



**DC-SERIES**

# ALLU DC-SERIES

## Compact Performance

**ALLU quality for jobs of all sizes**

**This compact series of high-quality screening buckets are designed for 2-10 t base machines, bringing world-class ALLU quality to jobs of all sizes. The DC-Series is available in three sizes: 2-04, 2-08 and 2-12.**



**DC2-04**

**Lightweight and low structure** - The compact size of the bucket enables good handling and balance. The lightweight bucket ensures the excavator's stability, and its low structure design eases bucket filling.



**DC2-08**

**Multiple applications** - The bucket can efficiently screen, separate, and crush hardened materials. It's made of wear-resistant steel, which, together with the TS 15 mm blades, allow the light crushing of clotted material.

**Self-cleaning drum and screening bed** - The bucket can handle screening of wet and hardened materials. The drums can be rotated in both directions to ease the material handling and drum cleaning.



**DC2-12**

**Plug'n'play** - The bucket has easy hydraulic connections and low oil flow requirements without a separate drain line. The hydraulic connections are protected behind the bucket.

**Multiple adapter options** - These compact screening buckets can be used on mini excavators, small wheel loaders, skid steers, and CTLs. They can be mounted directly or used with a tilt-rotator.

**Easy maintenance, high durability** - The TS drum structure ensures your operational efficiency with changeable blades. With the genuine ALLU spare parts, and the help of ALLU Support team, the DC-Series will be a long-lasting asset in your fleet.





# DC-SERIES:



2 - 10 ton



2-4 ton



## AVAILABLE MODELS

MODEL	EXCAVATOR		WHEEL LOADER		VOLUME		OIL FLOW		WEIGHT	
	t	lbs	t	lbs	m <sup>3</sup>	cu yd	l/min	gpm	kg	lbs
DC 2-04	2-4	4,400-8,800	-	-	0.09-0.11	0.12-0.14	15-30	4-8	170	352
DC 2-08	4-6	8,800-13,200	-	-	0.18-0.23	0.23-0.30	20-40	5-10	275	572
DC 2-12	5-10	11,000-22,000	2-4	4,400-8,800	0.34-0.42	0.43-0.53	40-80	10-20	415	836

# Skid Steers & CTLs

Using oversized attachments on skid steers or compact track loaders can lead to tipping, poor stability, and accessibility issues.

**ALLU DC 2-12** is specifically designed to be used on lightweight skid steers and CTLs. It has a light and low structure - meaning safe access to the cab and good stability while working, easy hydraulic connections and low oil flow requirements without a need for a separate drain line.

With the special adapter, the DC 2-12 will transform your lightweight fleet to multifunction tools in material processing.




**DC 2-12 SKID STEER**

### DL 2-12




Up from  
3 t / 6,600 lbs

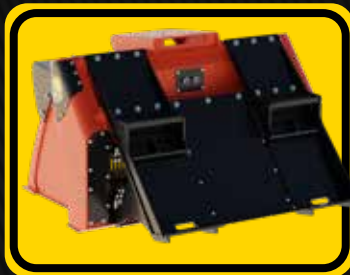

### DL 2-17



Up from  
4 t / 8,800 lbs

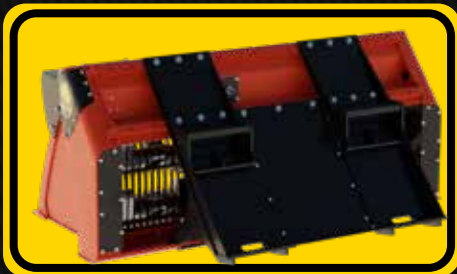

### DC 2-12



Up from  
2 t / 4,400 lbs

